

M

DIN 13

- Maschi a macchina 5750
- Maschinen Gewindebohrer 5750
- Thread Taps 5750




- Maschi a macchina 5760
- Maschinen gewindebohrer 5760
- Taps 5760

M

DIN 13


5750 VAP Titanio Innox > 900 Innox < 900 Acciai fino <48 Hrc ALU Acciai C40 Ferro Innox < 900 Innox > 900 Titanio 5760 VAP



64 Hrc Durezza

48 Hrc Durezza

36 Hrc Durezza



64 Hrc Durezza

48 Hrc Durezza

36 Hrc Durezza

Maschiatura


DIN 371 6HX

d1	P	l1	l2	d2	a	N	Pre-foro	DIN	€	Tempi Consegna	Code 5750
mm	mm	mm	mm	mm	h12 mm		mm		euro		
M2	0,40	45	8	2,8	2,1	3	1,60	371	34,54	●	P-M2
M3	0,50	56	10	3,5	2,7	3	2,50	371	19,80	●	P-M3
M4	0,70	63	12	4,5	3,4	3	3,30	371	20,16	●	P-M4
M5	0,80	70	14	6,0	4,9	3	4,20	371	21,25	●	P-M5
M6	1,00	80	18	6,0	4,9	3	5,00	371	22,81	●	P-M6
M8	1,25	90	20	8,0	6,2	3	6,80	371	24,85	●	P-M8
M10	1,50	100	20	10,0	8,0	3	8,50	371	31,65	●	P-M10

DIN 376 6HX

d1	P	l1	l2	d2	a	N	Pre-foro	DIN	€ euro	Tempi Consegna	Code 5750
mm	mm	mm	mm	mm	h12 mm		mm				
M12	1,75	110	29	9,0	7,0	3	10,20	376	44,85	●	P-M12
M14	2,00	110	30	11,0	9,0	3	12,00	376	61,29	●	P-M14
M16	2,00	110	32	12,0	9,0	3	14,00	376	65,55	●	P-M16
M20	2,50	140	34	16,0	12,0	4	17,50	376	95,30	●	P-M20
M24	3,00	160	38	18,0	14,5	4	19,50	376	125,80	●	P-M22
M30	3,50	180	45	22,0	18,0	4	21,00	376	228,10	●	P-M24

HSSE V3 INOX

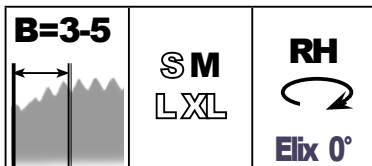

Vt (m/min)	Applicazione maschio						
Typ work	Acciaio <500	Acciaio <800	Acciaio automatico	Acciaio legato	Acciaio da utensili	Ghisa GG	Alluminio
Code 5750	20 - 40	20 - 40	5 - 15	8 - 10	3 - 5	15 - 30	10 - 30

Maschiatura


DIN 371 6HX

d1	P	l1	l2	d2	a	N	Pre-foro	DIN	€	Tempi Consegna	Code 5760
mm	mm	mm	mm	mm	h12 mm		mm		euro		
M2	0,40	45	8	2,8	2,1	3	1,60	371	37,98	●	C-M2
M3	0,50	56	10	3,5	2,7	3	2,50	371	21,80	●	C-M3
M4	0,70	63	12	4,5	3,4	3	3,30	371	22,08	●	C-M4
M5	0,80	70	14	6,0	4,9	3	4,20	371	23,32	●	C-M5
M6	1,00	80	18	6,0	4,9	3	5,00	371	23,32	●	C-M6
M8	1,25	90	20	8,0	6,2	3	6,80	371	27,24	●	C-M8
M10	1,50	100	20	10,0	8,0	3	8,50	371	34,81	●	C-M10

DIN 376 6HX

d1	P	l1	l2	d2	a	N	Pre-foro	DIN	€ euro	Tempi Consegna	Code 5760
mm	mm	mm	mm	mm	h12 mm		mm				
M12	1,75	110	29	9,0	7,0	3	10,20	376	49,32	●	C-M12
M14	2,00	110	30	11,0	9,0	3	12,00	376	67,41	●	C-M14
M16	2,00	110	32	12,0	9,0	4	14,00	376	72,15	●	C-M16
M20	2,50	140	34	16,0	12,0	4	17,50	376	104,75	●	C-M20
M24	3,00	160	38	18,0	14,5	4	19,50	376	138,46	●	C-M22
M30	3,50	180	45	22,0	18,0	4	21,00	376	217,25	●	C-M24

HSSE V3 INOX

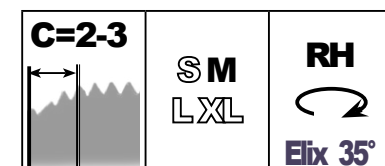

Vt (m/min)	Applicazione maschio						
Typ work	Acciaio <500	Acciaio <800	Acciaio automatico	Acciaio legato	Acciaio da utensili	Ghisa GG	Alluminio
Code 5750	20 - 40	20 - 40	5 - 15	8 - 10	3 - 5	15 - 30	10 - 30