



Techtools
High Performance Power Tools



Fresa concava 3298



Fraser 3298



Mills cutter 3298

FRESA

HSSE

UNIVERSAL

Acciai

Acciai

>58Hrc


Titanio

Inox

Alu<9%

3298

FRESA

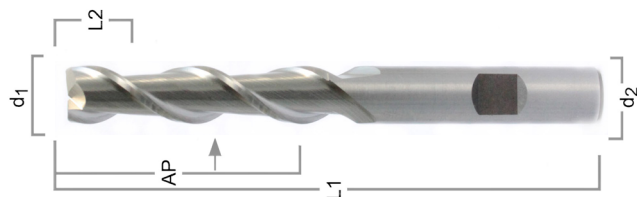

64 Hrc
Durezza

48 Hrc
Durezza

36 Hrc
Durezza

FRESA HSS Z2 N

Fresatura

D1	D2	L1	L2	Tagli	Tempi di Consegna	Fz / avanzamento mm/z Sgros. - Finit.	3298 Blank - HSS UNIVERSAL Codice
3,5	6	56	12	2	●	0,009 - 0,022	- 035
4,0	6	63	19	2	●	0,011 - 0,026	- 040
5,0	6	68	24	2	●	0,016 - 0,034	- 050
6,0	6	68	24	2	●	0,018 - 0,037	- 060
7,0	8	74	30	2	●	0,016 - 0,034	- 070
8,0	8	82	38	2	●	0,018 - 0,037	- 080
9,0	10	88	38	2	●	0,020 - 0,040	- 090
10,0	10	95	45	2	●	0,020 - 0,040	- 100
11,0	12	102	45	2	●	0,020 - 0,040	- 110
12,0	12	110	53	2	●	0,020 - 0,040	- 120
14,0	12	110	53	2	●	0,026 - 0,055	- 140
16,0	16	123	63	2	●	0,029 - 0,060	- 160
18,0	16	123	63	2	●	0,035 - 0,062	- 180
20,0	20	141	75	2	●	0,035 - 0,062	- 200
22,0	20	141	75	2	●	0,035 - 0,062	- 220
25,0	25	166	90	2	●	0,041 - 0,060	- 250
28,0	25	166	90	2	●	0,041 - 0,060	- 280
30,0	25	166	90	2	●	0,041 - 0,060	- 300

Vt (m/min)



Applicazione maschio

Typ work 3298	Acciaio <500	Acciaio <800	Acciaio automatico	Acciaio inossidabile	Ghisa GG	Alluminio
Code 3298	50	45	40	20 - 30	45 - 65	100