

M

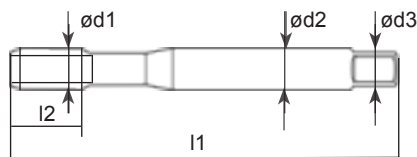
DIN 13

**Rullatore senza canalini**

Maschinen Gewindeformer 601



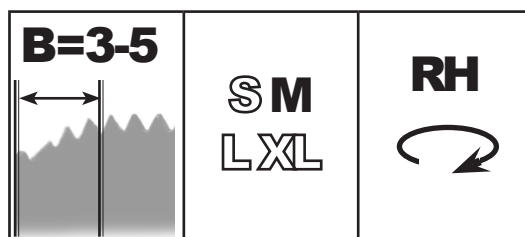
Thread Taps 601

**Techtools****High Performance Power Tools****SERIE 601****Ghisa****Inox < 900****Alu < 9%****Acciai****Acciai****Acciai****>48Hrc****64 Hrc
Durezza****48 Hrc
Durezza****36 Hrc
Durezza****Rullatura****DIN 371 6HX**

d1	P	l1	l2	d2	Pre-foro	a	Tempi di Consegna	Code 601 TIN
mm	mm	mm	mm	h9	mm	h12		
M3	0,5	56	10	3,5	2,80	2,7	●	-M3
M3,5	0,6	56	11	4	3,25	3	●	-M3,5
M4	0,7	63	13	4,5	3,70	3,4	●	-M4
M5	0,8	70	13	6	4,65	4,9	●	-M5
M6	1,0	80	16	6	5,55	4,9	●	-M6
M8	1,25	90	18	8	7,40	6,2	●	-M8
M10	1,5	100	20	10	9,30	8	●	-M10

DIN 376 6HX

d1	P	l1	l2	d2	Pre-foro	a	Tempi di Consegna	Code 601 TIN
mm	mm	mm	mm	h9	mm	h12		
M12	1,75	110	25	9	11,20	7	●	-M12

**HSSE
PM
601**

Vt (m/min)	Applicazione Rullatore						
Typ work 601	Acciaio <500	Acciaio <800	Acciaio automatico	Leghe e titanio	Acciaio inossidabile	Ghisa GG	Alluminio
Code 601	18 - 45	18 - 45	5 - 25	5 - 15	3 - 5	10 - 40	10 - 40