



Techtools
High Performance Power Tools



Maschi a macchina 00910



Maschinen Gewindebohrer 00910



Thread Taps 00910

UNF

DIN 13

>48Hrc

Acciai

Acciai


Acciai

Alu<9%

Inox < 900

Ghisa

SERIE 00910

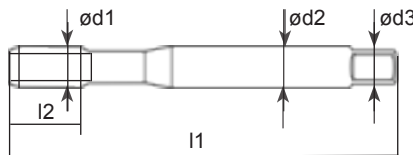

64 Hrc
Durezza

48 Hrc
Durezza

36 Hrc
Durezza

Maschiatura

DIN 2184-1 2B


d1	P	l1	l2	d2	a	N	Pre-foro	DIN	Tempi Consegna	Code 00910
mm	mm	mm	mm	mm	h12 mm		mm			
Nr.10	40	70	10	6	4,9	3	4,10	2184	●	C -Nr.10
1/4	32	80	12	7	5,5	3	5,50	2184	●	C -1/4UNF
5/16	32	90	12	6	4,9	3	6,90	2184	●	C -5/16UNF
3/8	24	100	14	7	5,5	3	8,50	2184	●	C -3/8UNF

DIN 2184-1 2B

d1	P	l1	l2	d2	a	N	Pre-foro	DIN	Tempi Consegna	Code 00910
mm	mm	mm	mm	mm	h12 mm		mm			
7/16	20	100	18	8	6,2	3	9,90	2184	●	C-7/16UNF
1/2	20	100	16	9	7	3	11,50	2184	●	C-1/2UNF
9/16	18	100	16	11	9	3	12,90	2184	●	C-9/16UNF
5/8	18	100	16	12	9	3	14,50	2184	●	C-5/8UNF
3/4	16	110	20	14	11	3	17,50	2184	●	C-3/4UNF

HSSE

00910

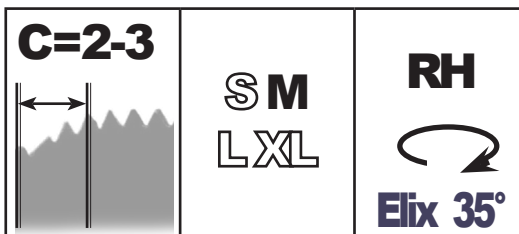

Vt (m/min)	Applicazione maschio						
Typ work	Acciaio <500	Acciaio <800	Acciaio automatico	Leghe e titanio	Acciaio inossidabile	Ghisa GG	Alluminio
Code 00910	8 - 25	8 - 15	5 - 15	5 - 8	3 - 5	10 - 15	10 - 20