



**Techtools**  
High Performance Power Tools



Maschi a macchina 9003



Maschinen Gewindebohrer 9003



Thread Taps 9003

**MF**

DIN 13

>48Hrc

Acciai

Acciai


Acciai

Alu<9%

Inox < 900

Ghisa

**SERIE 9003**

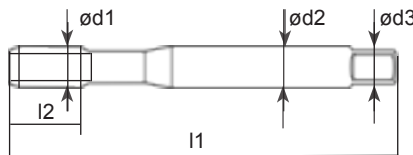

64 Hrc  
Durezza

48 Hrc  
Durezza

36 Hrc  
Durezza

Maschiatura


## DIN 371 6HX

d1	P	l1	l2	d2	a h12	N	Pre-foro	DIN	Tempi Consegna	Code 9003 V1
mm	mm	mm	mm	mm	mm		mm			
MF8	1	90	20	6,0	4,9	3	7,00	371	●	P-MF8X1
MF10	1	90	20	7,0	5,5	3	9,00	371	●	P-MF10X1
MF10	1,25	100	20	7,0	5,5	3	8,80	371	●	P-MF10X1,25

## DIN 376 6HX

d1	P	l1	l2	d2	a h12	N	Pre-foro	DIN	Tempi Consegna	Code 9003 V1
mm	mm	mm	mm	mm	mm		mm			
MF12	1,5	100	20	9,0	7,0	3	10,50	376	●	P-MF12X1,5
MF14	1,50	100	20	11,0	9,0	3	12,50	376	●	P-MF14
MF16	1,50	100	20	12,0	9,0	3	14,50	376	●	P-MF16

**HSSE**  
**V3**  
**9003**

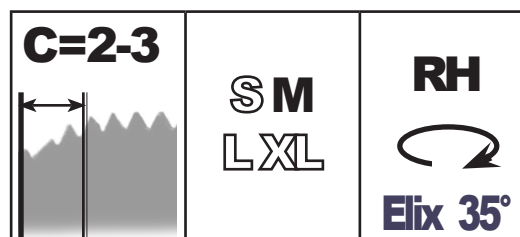

Vt (m/min)



Applicazione maschio

Typ work	Acciaio <500	Acciaio <800	Acciaio automatico	Acciaio legato	Acciaio da utensili	Ghisa GG	Ghisa GGG/GT
Code 9003	20 - 40	20 - 40	5 - 15	8 - 10	3 - 5	15 - 30	5 - 10