


Acciai
Acciai
>58Hrc
Titanio
Inox
Alu<9%

**3294 FRESA**

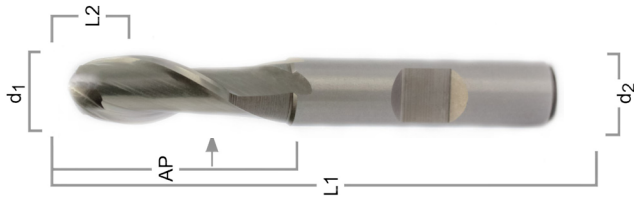

64 Hrc  
Durezza



48 Hrc  
Durezza

36 Hrc  
Durezza

## FRESA HSS Z2 N

Fresatura

D1	D2	L1	L2	AP	Tagli	Tempi di Consegna	Fz / avanzamento mm/z Sgros. - Finit.	3294 Blank - HSS SFERICA Codice
3,0	6	52	8	-	2	●	0,005 - 0,012	- 030
3,5	6	54	10	-	2	●	0,005 - 0,012	- 035
4,0	6	55	11	-	2	●	0,008 - 0,017	- 040
5,0	6	57	13	-	2	●	0,008 - 0,017	- 050
6,0	6	57	13	21	2	●	0,008 - 0,017	- 060
7,0	8	60	16	-	2	●	0,013 - 0,029	- 070
8,0	8	69	19	33	2	●	0,013 - 0,029	- 080
9,0	10	69	19	-	2	●	0,013 - 0,029	- 090
10,0	10	72	22	32	2	●	0,020 - 0,030	- 100
11,0	12	79	22	-	2	●	0,022 - 0,031	- 110
12,0	12	83	26	38	2	●	0,022 - 0,031	- 120
14,0	12	83	26	-	2	●	0,026 - 0,034	- 140
16,0	16	92	32	44	2	●	0,026 - 0,034	- 160
18,0	16	92	32	-	2	●	0,032 - 0,064	- 180
20,0	20	104	38	54	2	●	0,035 - 0,073	- 200
22,0	20	104	38	-	2	●	0,035 - 0,073	- 220
25,0	25	121	45	65	2	●	0,047 - 0,082	- 250
28,0	25	121	45	-	2	●	0,056 - 0,090	- 280
30,0	25	121	45	-	2	●	0,065 - 0,100	- 300

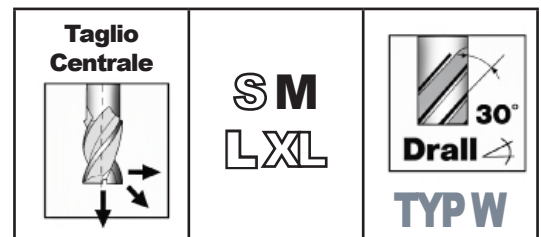

Vt (m/min)	Applicazione maschio					
Typ work 3294	Acciaio <500	Acciaio <800	Acciaio automatico	Acciaio inossidabile	Ghisa GG	Alluminio
Code 3294	50	45	40	20 - 30	45 - 65	100